
Willoughby Locking Systems

TOCATING SYSTEM

WLS-1717 Stainless Steel Food Pass Lock



Recommended Specifications

The WLS-1717 series lock is used in high security applications for food pass doors, observation panels and other small doors in Governmental and Industrial buildings. The WLS-1717 series uses a paracentric cylinder and key.

The WLS-1717 is not recommended as a primary means of securing a full door or when dead latching is a requirement.


Standard lock shall include:

- High security and impact resistant
- 1/2" latch throw
- Latch size is 1-1/2" x 3/4"
- Lock case, cover and latch are constructed from cast stainless steel utilizing harded brass key, cylinder and tumblers
- Lever tumblers are designed with 'anti-pick' notches for both the locked and unlocked positions
- Key-way depths are designed to impede of 'picking' of locks
- Key is made of bronze alloy and machined to fit smoothly into lock (sold separately)
- Lock is mounted with 4 security screws (included with lock)
- Standard handing is Right Hand (RH) for food pass.

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a food pass stainless steel lock, and keyed one side.

Use the following Willoughby Model Number: WLS-1717-K1





MODEL NUMBER AND OPTIONS:

1.) Model Number:


■ WLS-1717 Stainless Steel Food Pass Lock

2) Keyed:

- ☐ K1 Keyed One Side
- ☐ K2 Keyed Both Sides
- Other

3) Extended bolt:

☐ EXB 1" Extended Bolt

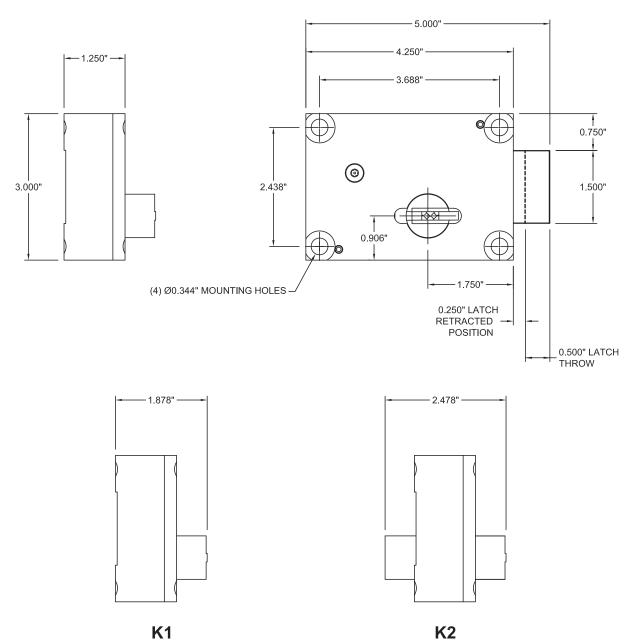

DRAWINGS ARE FOR REFERENCE ONLY, CONTACT FACTORY TO VERIFY DIMENSIONS

WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.


visit our website at www.willoughbylocks.com


5105 West 78th Street • Indianapolis, IN. 46268 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



ADDITIONAL INFORMATION:

LOCK HANDING CHART






KEYED K1 STOP SIDE

HOLLOW METAL MOUNTING PLATE

(FOR IN-SWING DOORS)

KEYED K1 HINGED SIDE HOLLOW METAL MOUNTING PLATE (FOR OUT-SWING DOORS)

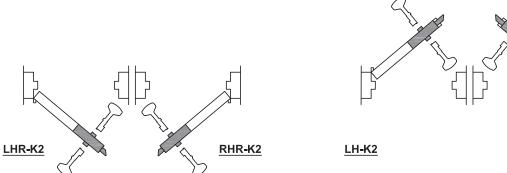

KEYED K2 HOLLOW METAL MOUNTING PLATE (FOR OUT-SWING DOORS)

KEYED K2 HOLLOW METAL MOUNTING PLATE (FOR IN-SWING DOORS)



L1-9

RH-K2

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065